


# TSM

**TUBULAR SPECIALTIES MFG., INC.**

13011 S. SPRING ST., LOS ANGELES, CA 90061-1685 • 213/515-4801 TOLL FREE 800/421-2961 CA ONLY 800/521-7548  
 DESIGNER SERVICE: 7:00 A.M. TO 5:00 P.M. PACIFIC TIME • TELEX II: 910-346-6362 • FAX: 213/217-0653

# 5202

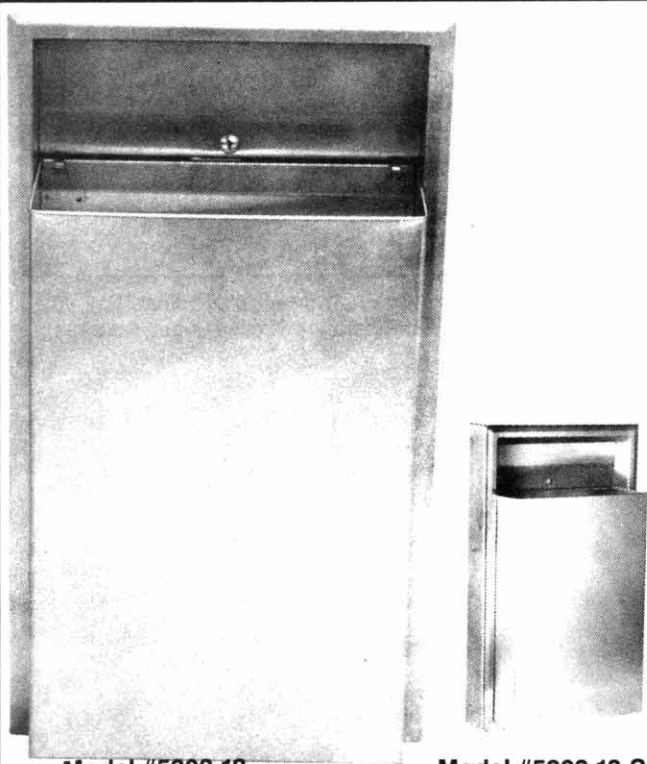

Model #5202-12

Model #5202-12-S4

## RECESSED WASTE RECEPTACLE



### DESIGN CONSIDERATIONS

- The 12-gallon and 18-gallon waste receptacles are interchangeable in the same 5202 frame. Most restrooms are adequately served with the 12-gallon capacity; however, if washroom traffic increases substantially, an 18-gallon receptacle can be installed in the frame without modification.
- TSM does not provide nor recommend rigid vinyl liners for its waste receptacles for the following reasons:
  - If a lighted cigarette is tossed into the receptacle, fumes from the smoldering PVC liner create a safety and health hazard.
  - Vinyl liners are an unnecessary expense—most maintenance personnel use disposable plastic bags for sanitary reasons.
  - In addition, the rigid liners create extra work; the receptacle must be opened with a key to access the liner to be removed, carried to a disposal location, emptied, cleaned, then returned to the inside of the stainless steel receptacle and locked up again.

### MODEL NUMBERS (select one)


See chart below for description of model numbers.

- 5202-12
- 5202-12-S2
- 5202-12-S4
- 5202-18
- 5202-18-S2
- 5202-18-S4



### FINISH (select one)

- #4 Satin (standard)
- Other (additional charge; see Finish Schedule, Reference Section A, for options)

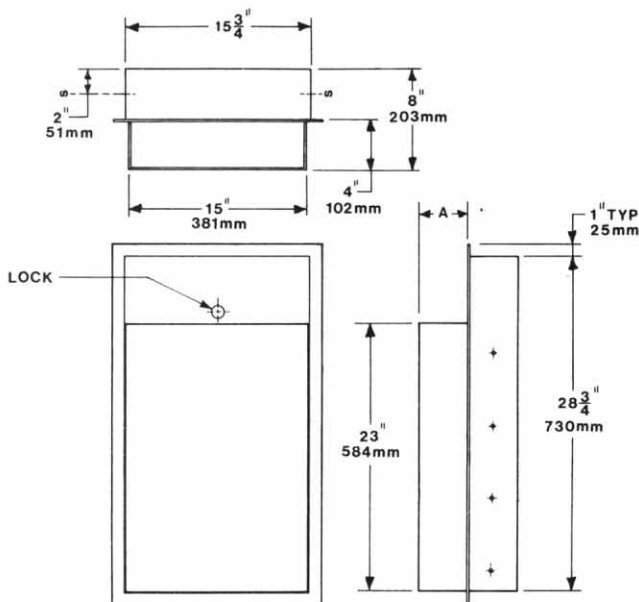

	<b>A</b>
Model # 5202-12	4"
	102mm
Model # 5202-18	8"
	203mm





## SUGGESTED ARCHITECTURAL SPECIFICATION

TSM model \_\_\_\_\_ (fill in model number) Waste Receptacle from Tubular Specialties Manufacturing, Inc., Los Angeles, California (213) 515-4801. Construction: stainless steel Type 304 (18-8) 22 gauge (0.8mm), welded. Finish: \_\_\_\_\_ (select from Finish Schedule). Mounting Frame: \_\_\_\_\_ (recessed, semi-recessed, or surface mounted). Flange: drawn, one-piece, seamless construction with no mitered corners. Capacity: \_\_\_\_\_ (12 or 18) gallons. Manufacturer's name is not shown on any exposed surface.



## MATERIALS/WORKMANSHIP

**Mounting Frame**—Stainless steel Type 304 (18-8) 22 gauge (0.8mm). Flange is drawn, one-piece seamless construction with no mitered corners.

**Receptacle**—Stainless steel Type 304 (18-8) 22 gauge (0.8mm). Secured to cabinet by pin tumbler cylinder lock. Four hooks provided to hold plastic trash bags (not supplied by TSM). Top and bottom edges are hemmed for safety. Capacity: 5202-12 holds 12 gallons (45.5 liters) and 5202-18 holds 18 gallons (68.2 liters).

**Skirt (Semi-Recessed and Surface Mounted models only)**—Stainless steel Type 304 (18-8) 22 gauge (0.8mm), formed and welded construction.



## INSTALLATION

For handicapped mounting, top of cabinet should be no more than 44" (1118mm) from finish floor.

Recessed and semi-recessed installation: Provide framed wall opening 16" (406mm) wide x 29-1/4" (743mm) high with a minimum recessed depth of 4-1/4" (108mm) for recessed and 2-1/4" (57mm) for semi-recessed mounting. Multiple screw holes at sides of cabinet allow secure mounting in wood or metal framing. Position unit to avoid pipes, vents and conduits previously installed in wall. After installing shims as required to give a solid base, complete installation using screws provided by manufacturer at locations marked by an "S."

Surface mounting: With skirt in place, apply to wall with screws provided by manufacturer (see Installation, Reference Section C, for various applications).



## DISTRIBUTION

TSM maintains a worldwide network of distributors. Call your sales representative listed in Reference Section O for the names of those nearest you.

Model Numbers For Recessed Waste Receptacle			
Mounting			
Capacity	Recessed	Semi-Recessed with 2" Skirt	Surface Mounted with 4" Skirt
12 Gallon	5202-12	5202-12-S2	5202-12-S4
18 Gallon	5202-18	5202-18-S2	5202-18-S4